

A tradition of innovation since 1966

HAYBUSTER®

2665 "SHORTCUT"

[two bale processor]

HAYBUSTER®

TUB GRINDERS

GRAIN DRILLS

ROCK PICKERS



Can you imagine a better bale processor than the Model 2655? We did it!!!

INTRODUCING THE HAYBUSTER 2665!

- *Taller Shredder Frame with Optional Containment Kit*
 - *Heavier Conveyor Table Chains & Drive Shafts*
 - *Wider Conveyor Table*
 - *Reposition Loader for Easy Bale Loading*
 - *Heavier Rotor Shafts*
 - *Optional Heavy Duty Knobby Tires*
 - *All the Features of the "Shortcut" 2655 that you have come to appreciate.....*
 - *More Flails, more Slugbars, more Stripper Kitsand MORE CUT!*

SPECIFICATIONS WEIGHT

Total - 5150 lbs (2336 kg)

Tongue - (Bale loader fully raised) - 1560 lbs (707.6kg)

TRANSPORT DIMENSIONS

(Bale loader fully raised, deflector folded)

Width - 8 ft 4 in (2.52 m)

Length - 14 ft 11 in (4.55 m)

Height - 11 ft (3.35 m)

WORKING DIMENSIONS

(With 1 bale, deflector in spread position)

Width - 10 ft 10 in (3.31 m)

Length - 14 ft 11 in (4.55 m)

Height - 11 ft (3.35 m)

(With 2 bales, deflector in spread position)

Width - 10 ft 10 in (3.31 m)

Length - 19 ft 7 in (5.95 m)

Height - 11 ft (3.35 m)

CHASSIS FEATURES

Towing Arrangement - Clevis type hitch

Jack Capacity - 5000 lbs (2,273 kg)

Jack Travel - 10 in (25.4 cm)

Bearing Type - Tapered Roller

BALE LOADER

Type - Integral 2 Stage, Twin Boom Arms

Bale Tines - Tubular Steel, 10° Float, 4 Position Width

Adjustable Hydraulic Cylinder -

4-1/2 in x 24 in (11.43 cm x 60.96 cm)

Double-Acting

BALE CONVEYOR

Type - 3 Roller Chains with Bolt-On Cross Slat

Drive - Hydraulic Orbital Motor with Adjustable

Flow Control

Drive Shaft Bearings - 1 1/4" (3.18 cm)

Drive Shafts - 1 1/4" (3.18 cm)

BALE SHREDDER CHAMBER

Max. Bale Weight each - 2200 lbs (1000 kg)

Rotor Length - 78 in (1.98 m)

Rotor Diameter (Flails extended) -

25 in (63.5 cm)

Rotor Bearing - Ball, 2 in (63.5 cm)

Rotor Speed - 1300 RPM

Number of Flails - 40

Flail type - Heavy Duty, 7/16 in (11.11 mm) thick, 3

lbs (1.36 kg), Heat Treated Spring Steel, Swinging

Number of Stripper Channels - 3

Number of Slugbars - 9

Slugbar - Single point, 9 Adjustment Settings through

a 180° Range (optional hydraulic adjustment)

Delivery - Right Hand Discharge

Deflector - 6 Adjustment Settings through a 120°

Range (optional hydraulic adjustment)

Max. Horizontal Spread - Straw, up to 50 ft (15.24 m)

OPERATOR CONTROLS

Loader - 1 Tractor Double-Acting Hydraulic Valve

Bale Conveyor - 1 Tractor Double-Acting Hydraulic

Valve

Bale Conveyor Speed - Conveyor Speed Control Valve

Slugbar - Hand Lever with 5 Settings

(optional hydraulic adjustment)

Deflector - Hand Lever with 6 Settings

(optional hydraulic adjustment)

REQUIREMENTS FOR OPERATION

PTO Horsepower Required - 65hp(48.5kw) to

155hp(115.6kw)

PTO Type - 1000 RPM, 138 in dia PTO Shaft

with 21 Splines

Min. Tractor Hydraulic Output - 8 gpm at 1500psi (46

lpm x 10,345 kpa)

Tractor Hydraulic Controls - 2 Double-Acting Control

Valves with Quick Coupler Outlets


Tractor Weight - must be of equal or greater weight

than that of a 2650 with 2 bales

SPECIFICATIONS

[2665 Shortcut balebuster]

2665

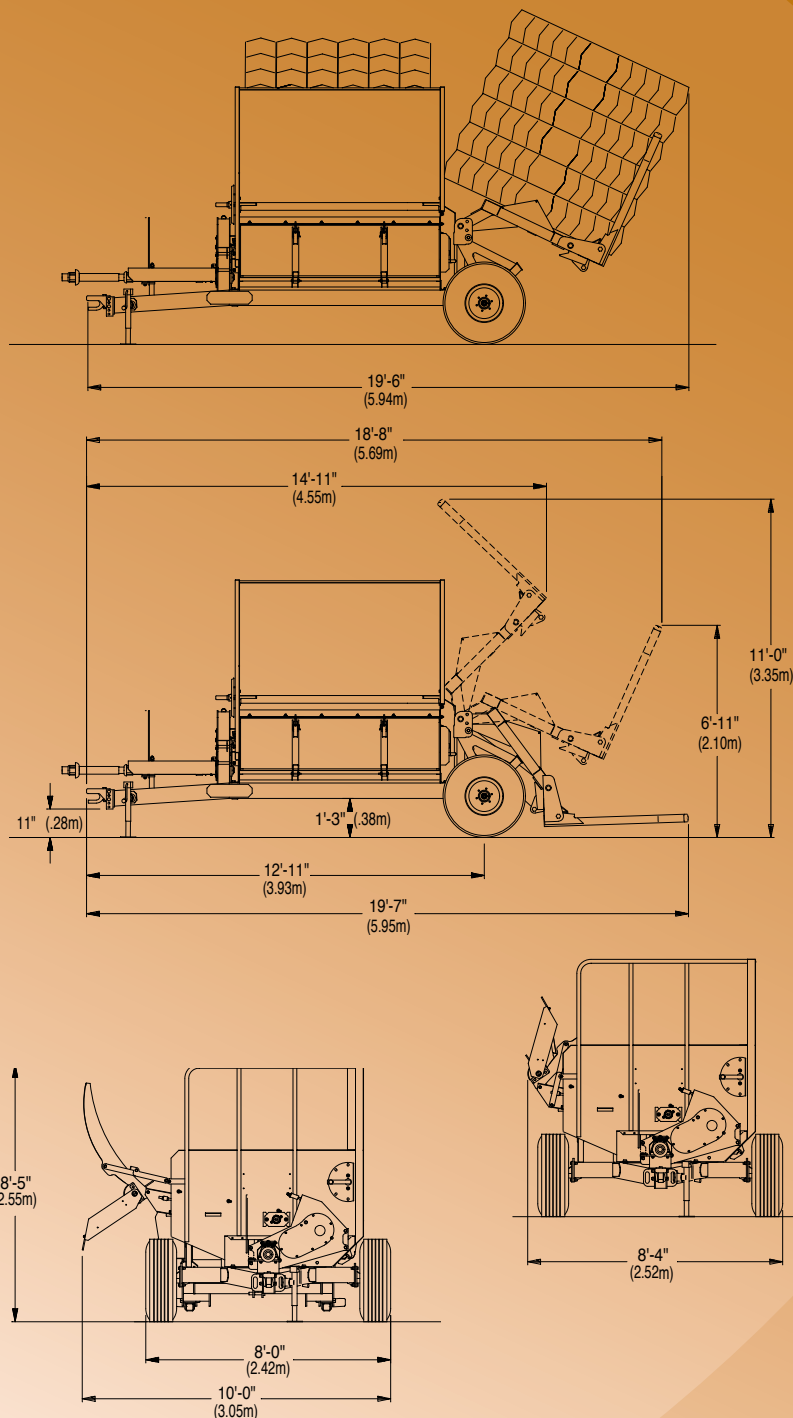

PO Box 1940

Jamestown, ND 58402-1940

Phone: (701) 252-4601

Fax: (701) 252-0502

Website: www.haybuster.com



DuraTech Industries International, Inc. reserves the right to change its products or their specifications at anytime without notice or obligation. Illustrations, specifications, and descriptions contained herein were accurate at the time of publication, but are subject to change without notice. Illustrations may include optional equipment or accessories and may not include all standard equipment.

UP 2000 04/14