

A tradition of innovation since 1966

HAYBUSTER

2655 "SHORTCUT"

[two bale processor]

HAYBUSTER



TUB GRINDERS

GRAIN DRILLS

ROCK PICKERS

The "BEST" Balebuster just got "BETTER".

*We've added MORE FLAILS,
MORE SLUGBARS,
MORE ROTOR SPEED,
MORE STRIPPER KITS
and now we have MORE CUT!*

Add this to the proven model 2650 Balebuster and you get the new model 2655 "Shortcut" Balebuster that provides a consistently shorter cut!

See your local Authorized Haybuster Dealer for more details.

SPECIFICATIONS WEIGHT

Total - 4700 lbs (2132 kg)
Tongue - (Bale loader fully raised) - 1300 lbs (589.7kg)

TRANSPORT DIMENSIONS

(Bale loader fully raised, deflector folded)
Width - 8 ft 4 in (2.52 m)
Length - 14 ft 11 in (4.55 m)
Height - 11 ft (3.35 m)

WORKING DIMENSIONS

(With 1 bale, deflector in spread position)
Width - 10 ft 10 in (3.31 m)
Length - 14 ft 11 in (4.55 m)
Height - 11 ft (3.35 m)
(With 2 bales, deflector in spread position)
Width - 10 ft 10 in (3.31 m)
Length - 19 ft 7 in (5.95 m)
Height - 11 ft (3.35 m)

CHASSIS FEATURES

Towing Arrangement - Clevis type hitch
Jack Capacity - 5000 lbs (2,273 kg)
Jack Travel - 10 in (25.4 cm)
Tires - 2) 12.5L x 15 - 8 Ply
Wheels - 2) 10 x 15 - 6 Bolt, Drop Center
Bearing Type - Tapered Roller

BALE LOADER

Type - Integral 2 Stage, Twin Boom Arms
Bale Tines - Tubular Steel, 10° Float, 4 Position Width
Adjustable Hydraulic Cylinder -
4-1/2 in x 24 in (11.43 cm x 60.96 cm)
Double-Acting

BALE CONVEYOR

Type - 3 Roller Chains with Bolt-On Cross Slat
Drive - Hydraulic Orbital Motor with Adjustable
Flow Control

BALE SHREDDER CHAMBER

Max. Bale Size - 6 ft long x 6-1/2 ft dia
(1.83 m x 1.98 m)
Max. Bale Weight each - 2200 lbs (1000 kg)
Rotor Length - 78 in (1.98 m)
Rotor Diameter (Flails extended) -
25 in (63.5 cm)
Rotor Bearing - Ball, 13/4 in (4.44 cm)
Number of Flails - 40
Rotor Speed - 1300 RPM
Flail type - Heavy Duty, 7/16 in (11.11 mm) thick, 3
lbs (1.36 kg), Heat Treated Spring Steel, Swinging
Number of Stripper Channels - 3
Number of Slugbars - 9
Slugbar - Single point, 5 Adjustment Settings through
a 180° Range (optional hydraulic adjustment)
Delivery - Right Hand Discharge
Deflector - 6 Adjustment Settings through a 120°
Range
Max. Horizontal Spread - Straw, up to 50 ft (15.24 m)

OPERATOR CONTROLS

Loader - 1 Tractor Double-Acting Hydraulic Valve
Bale Conveyor - 1 Tractor Double-Acting Hydraulic
Valve
Bale Conveyor Speed - Conveyor Speed Control Valve
Slugbar - Hand Lever with 5 Settings
(optional hydraulic adjustment)
Deflector - Hand Lever with 6 Settings
(optional hydraulic adjustment)


REQUIREMENTS FOR OPERATION

PTO Horsepower Required - 65hp(48.5kw) to
155hp(115.6kw)
PTO Type - 1000 RPM, 138 in dia PTO Shaft
with 21 Splines
Min. Tractor Hydraulic Output - 8 gpm at 1500psi (46
lpm x 10,345 kpa)
Tractor Hydraulic Controls - 2 Double-Acting Control
Valves with Quick Coupler Outlets
Tractor Weight - must be of equal or greater weight
than that of a 2650 with 2 bales

SPECIFICATIONS

2655 Shortcut balebuster 1

2655

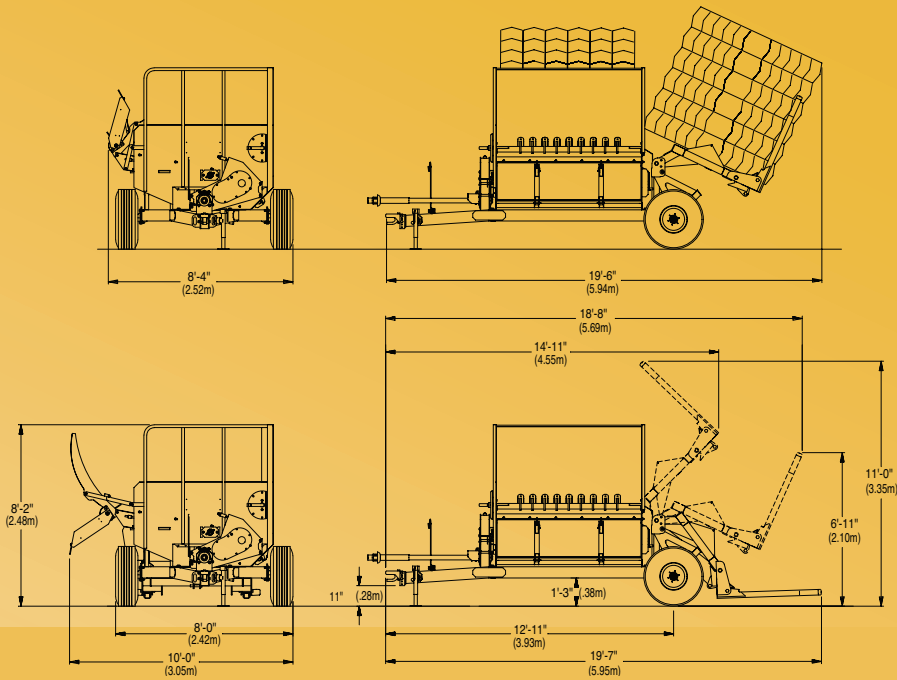

"SHORTCUT"

OPTIONS

- Hydraulic Deflector
- Hydraulic Slugbar
- 24 bu Feed Tank
- Electronic Scale
- Wide Deflector Belt
- Fenders
- Road Lights
- Road Tires (31x10x15) Load Range
- Flotation Tires (14Lx16.1) - 8 ply

PO Box 1940

Jamestown, ND 58402-1940

Phone: (701) 252-4601

Fax: (701) 252-0502

Website: www.haybuster.com

HAYBUSTER®

DURATECH®
INDUSTRIES

DuraTech Industries International, Inc. reserves the right to change its products or their specifications at anytime without notice or obligation. Illustrations, specifications, and descriptions contained herein were accurate at the time of publication, but are subject to change without notice. Illustrations may include optional equipment or accessories and may not include all standard equipment.